

Sez D Frese a gambo filettato - Router bits with threaded shank


Tipo 2TT gf

Fresa cilindrica con tagliente di testa a gambo filettato

Attacco M x per macchine ELU Felisatti ecc

Cylindrical cutter with bottom tip with threaded shank

M x inner threaded shank for machines ELU Felisatti etc ...

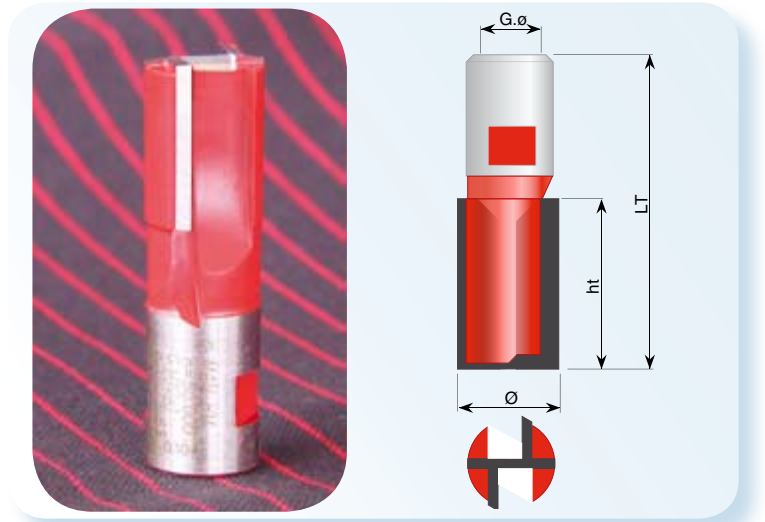

Ø	ht	LT	Art.	Gø 12x1
8	25		40	811
9	25		40	814
14	25		40	342
19	25		40	347


HW	Ø	ht	LT	Art.	Gø 12x1
	8	25	63	1125	
	10	25	63	1127	
	12	25	63	1129	
	14	25	63	1132	
	16	25	63	1137	
	18	25	63	1140	
	20	25	63	1143	
	22	25	63	1146	
	24	25	63	1149	
	25	25	63	1151	
	8	35	73	1126	
	10	35	73	1128	
	12	35	73	1130	
	14	35	73	1133	
	16	35	73	1138	
	18	35	73	1141	
	20	35	73	1144	
	22	35	73	1147	
	25	35	73	2490	
	30	35	73	2491	
	12	40	78	1131	
	14	40	78	1134	
	16	45	83	1295	
	16	50	88	1139	
	18	50	88	1142	
	20	50	88	1145	
	22	50	88	1148	
	24	50	88	1150	

Sez D Frese a gambo filettato - Router bits with threaded shank

Tipo C gf

 Fresa per rifilo con cuscinetto inferiore a gambo filettato

 Lower bearing guided trim cutter with threaded shank

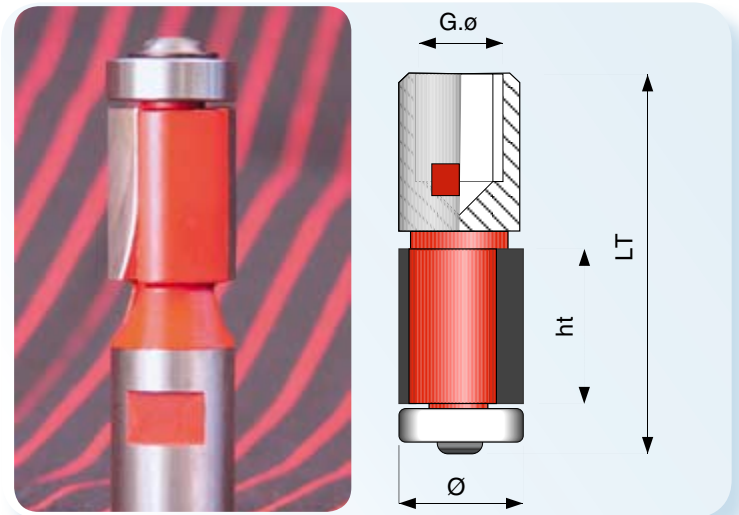


HW	ø	ht	LT	Art. Gø 12x1
	19	25	60	515
	19	35	70	1161

Standard	ø	ø	S-ht	Codice
Cuscinetto	19	7	6	506073000 Bearing
Vite	M 6		10	973810610 Screw

Tipo C2 gf

 Fresa doppio rifilo a gambo filettato

 Double trim cutter with threaded shank

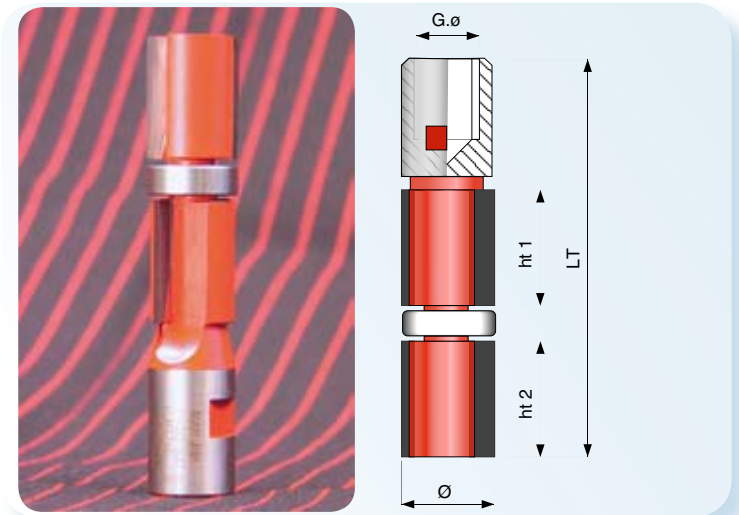

HW	ø	ht1	ht2	LT	Art. Gø 12x1
	19	25	25	90	516
	19	35	25	100	1162